
JE-24PM-H



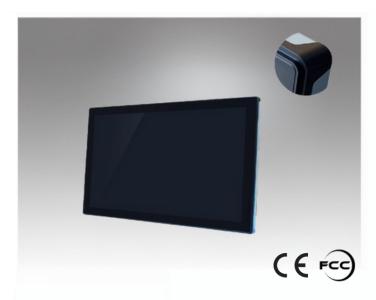

We are committed to developing high-quality and highly innovative products while providing the best services to global customers.

Features

- Modular Design
- Touch glass and screen can be independently replaced.
- Uses A-grade LCD panel manufacturer's backlight module panel
- CE/FCC certified



Introuduction

This 24-inch LCD monitor provides a clear 1920x1080 resolution, 250 nits brightness, and a 3000:1 contrast ratio for sharp and detailed display. With an 16ms response time, it supports both VGA and HDMI interfaces for versatile device connectivity. The display offers 16.7 million colors and boasts a 30,000-hour backlight lifespan, ensuring stable performance over extended use. The monitor's plastic frame and metal back shell make it durable and robust, suitable for various environments such as homes and offices. Additionally, it has low power consumption (22W), making it energy-efficient.

Specifications

LCD

Screen size 24 "
 Screen diadonal 16:9(H:V)
 Pixels H x V 1920*1080/60HZ

Visual angle Horizontal (L/R) CR≥10 89 °/89 °
 Vertical (up/down) CR≥10 89 °/89 °

• Displays the size 527mm (W) × 296mm (H)

Luminance 250nits
 Contrast ratio 3000:1
 Response time 16ms
 Display plays color 16.7M
 Backlight life 30K hours

Interface function

• Support interface VGA,HDMI

Sorce

• Input voltage External adapter ∶ 100-240V AC → 50-60 Hz
• Consumption External adapter ∶ 100-240V AC → 50-60 Hz
• Input voltage range ∶ +12V DC ± 5%

28W

Material and packaging

Face frame material PlasticRear shell material Sheet metal

• Frame size 580mm (W) x 356mm (H) x 50mm (D)

Back keyhole size Schematic

• Carton size 655mm (W) × 430mm (H) × 130mm (D)

Weight 6.8 KgAccessories VGA + Adapter

Work environment warranty

Working temperature
 Operating humidity
 Storage temperature
 Store humidity
 10% - 90%

Warranty

One year (Except for man-made damage)



Dimensions

