
JE-43JTPM-YL






We are committed to developing high-quality and highly innovative products while providing the best services to global customers.

Features

- Modular Design
- Touch glass and screen can be independently replaced.
- Uses A-grade LCD panel manufacturer's backlight module panel
- CE/FCC certified

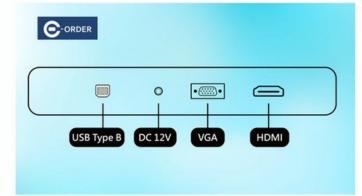

Introuduction

This 43-inch LCD monitor provides a 1920x1080 resolution, 300cd/ m² brightness, and a 1300:1 contrast ratio, delivering clear and detailed display quality with a wide 178° viewing angle. It features 10-point touch technology with quick response time (<5ms), ideal for interactive applications. Supporting VGA and HDMI interfaces, it s compatible with Windows 7, 8.1, and 10 operating systems. The monitor is made of durable metal and has a 30,000-hour backlight lifespan, making it suitable for business, education, and home use. The package includes a VGA cable, power adapter, and USB cable, and it operates in a wide range of environments.

Specifications

LCD

Screen size 48 "
Screen diadonal 16:9(H:V)
Pixels H x V 1920*1080/60HZ

Visual angle Horizontal/Vertical: 178°/178°
Displays the size 557.9mm (W) × 963.6mm (H)

Luminance 300cd/m²
Contrast ratio 1300:1
Response time 8ms
Display plays color 16.7M
Backlight life 30K hours

Material and packaging

Face frame material Plastic

• Rear shell material Sheet metal (Black yarn spray paint)

Frame size SchematicBack keyhole size Schematic

• Carton size $108 \mathrm{cm} \, (\mathrm{W}) \times 70 \mathrm{cm} \, (\mathrm{H}) \times 21 \mathrm{cm} \, (\mathrm{D})$

Weight 22 Kg

Accessories
VGA + Adapter + USB

Touch Screen Paremeters

• **Touch Technology** Projected G+FF Capacitive

Response Time <5ms
Touch Screen Interface USB
Touch Point 10

Interface function

Support interface VGA,HDMI

• System support Windows7 / Windows8.1 / Windows10

Sorce

• Input voltage External adapter: 100-240V AC, 50-60 Hz

Consumption 135W

Work environment warranty

Working temperature 0°C - 40°C
Operating humidity 20% - 80%
Storage temperature -20°C - 60°C
Store humidity 10% - 90%

Warranty

One year (Except for man-made damage)



Dimensions

